

Seat level indicator using

The level indicator is design to help you to ensure the seat is positioned at the correct angle.


Note : always check the level indicator before and after fitting the seat belts.



Using in the car with standard seat belts

(Please read the important safety points carefully)

Only suitable if the approved vehicles are fitted with 3 point static or with retractor safety belts, do not place car seat in a rear-facing vehicle seat. Do not place car seat in a side-facing vehicle seat.

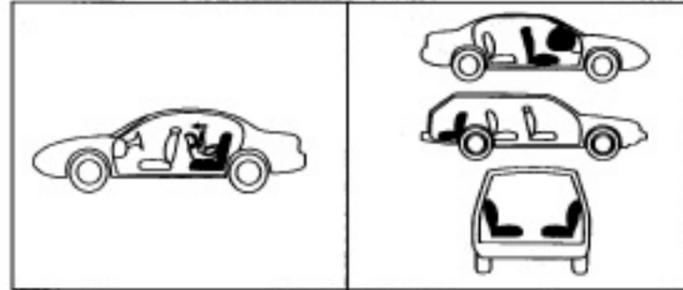

1. Place your car seat into a forward-facing vehicle seat with no air bag and with an approved type of seat belt. Face your car seat toward the rear of the vehicle. Check the handle is facing up. Don't use car seat in a vehicle with the handle in the down or sitting position.



2. Put lap belt (A) over car seat and under the two belt hooks (B). (Fig .1)

3. Place shoulder belt around the back of the car seat exactly as shown (fig2). Make sure to run it through the center belt guides on the back of the seat and below the upper seat belts guides. When the belt is fitted correctly it will pass over the top of the child seat as shown position.

4. Buckle the vehicle belt.

Important note:

After installation and tightening the seat belt anchorage point, buckle must be at least 1 inch from the main lap belt guides slot and towards the FOOTREST END of the child seat.

If the seat does not feel secure, go back to reinstall it. Only once the seat is secure, it is ready to use.

Care of your child seat

1. To clean the harness and plastics, sponge with warm water and allow to dry.
2. The cover and accessories are removable for cleaning (follow the wash care instructions on the label on the cover).
3. The canopy can be removed by simply pulling the frame out of the fixings.
4. Do not use solvents, chemical cleaners or lubricants on any part of the seat and never attempt to bleach or dye the webbing.
5. Allow all parts to dry naturally.

Model 82185



Urban Escape Car Seat

For infants up to 13Kg(Group 0+)
conforms To ECE R44.04 Universal

IMPORTANT-KEEP FOR FUTURE REFERENCE

EXTREME HAZARD: Parents should not under any circumstances use this child restraint on a passenger seat equipped with an airbag.


Supplied by:
The Babyfactory NZ Ltd
58 Stonedon Drive, East Tamaki, Auckland, NZ
www.babyfactory.nz

Important Safety Points



Do read these instructions before fitting the car seat in your car or stroller so that you may be familiar with it and avoid any dangerous misuse.

- Never leave your child unattended in the car seat.
- Never use the car seat in passenger seats with airbags.
- Always ensure the the child's harness is correctly fastened..
- Always check the carseat is fully secured before use.
- The handle should be placed in the upright position when installed in the vehicle seat.
- The buckle should always be easily accessible. Child should be taught never to play the buckle. It is important that the child can be released quickly in the event of an emergency.
- Only suitable if the approved vehicles are fitted with 3 point static or with retractor safety belts, approval to UN/ECE regulation No.16 or other equivalent standards.
- Do not place car seat in a vehicle seat that uses an air bag.
- Do not place car seat in a side-facing vehicle seat.
- The car seat is for children form birth to 13kg/29IBS (12-15months approx).
- It shall be recommended that the device should be changed when it has been subject to violent stresses in an accident.

Get to know your car seat

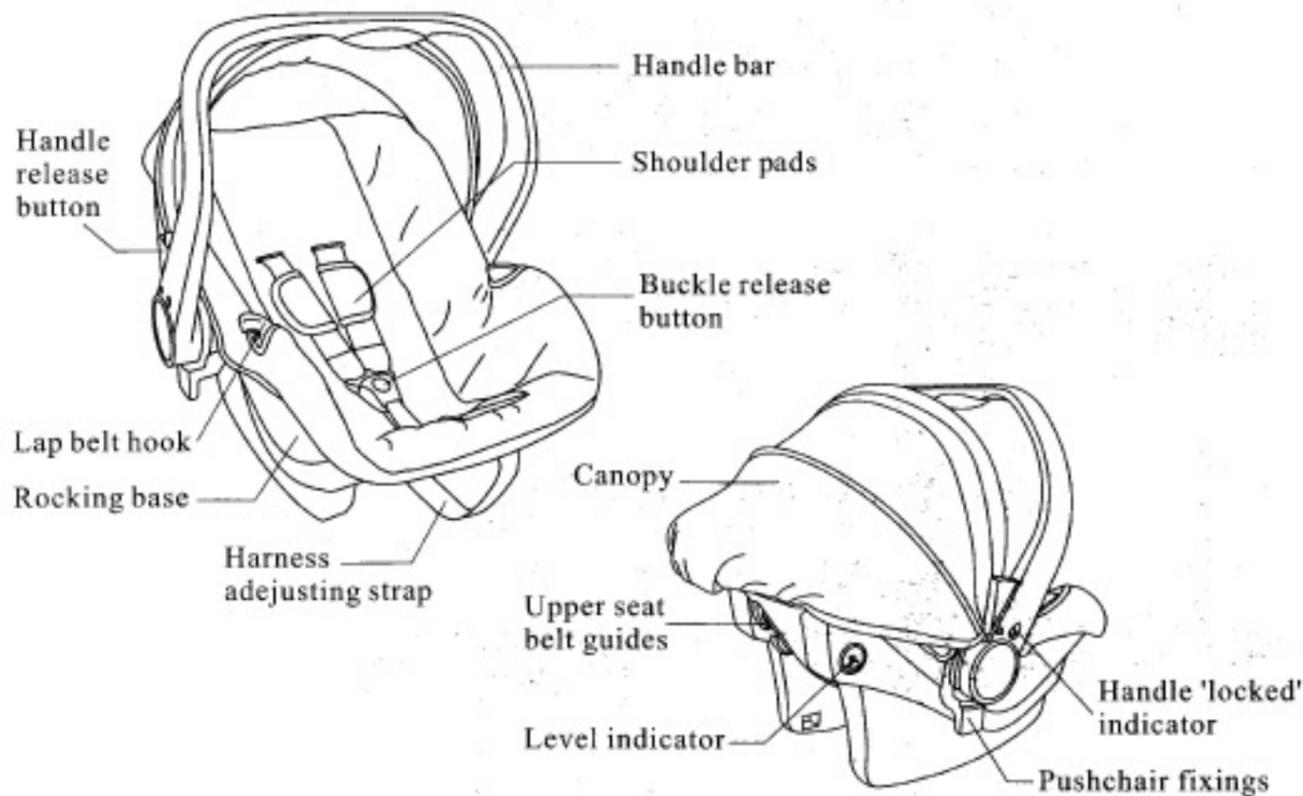


Adjusting the handle

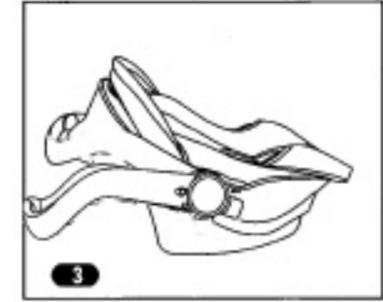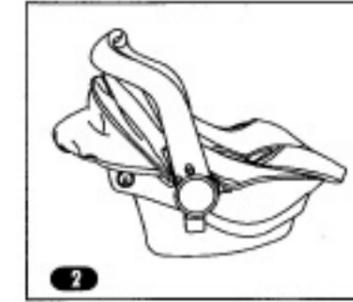

To adjust the handle by press both handle release button, move the handle to the proper position (1-2-3), and release the button.

Securing your baby


1. Place baby in seat .(make sure baby's back and bottom are flat against seat.)
2. Position the shoulder straps at the correct height in the carseat. Place shoulder straps over the infant's shoulders and position the two locking clips together as shown in (fig1,2).
3. Push the two locking clips into the buckle housing as per fig 3. Until you hear a "click" . Check the buckle is secure. The shoulder straps are now correctly secured to ensuring safety for your child.
4. To tighten the shoulder straps, push the harness button at the front of the seat and pull the harness adjusting strap. To loosen the shoulder straps, push the harness button and pull the two shoulder straps towards yourself. It is recommended that there is enough room to insert two fingers between the shoulder straps and the child's chest.
5. To open the harness.
The buckle is released by pressing the red button.

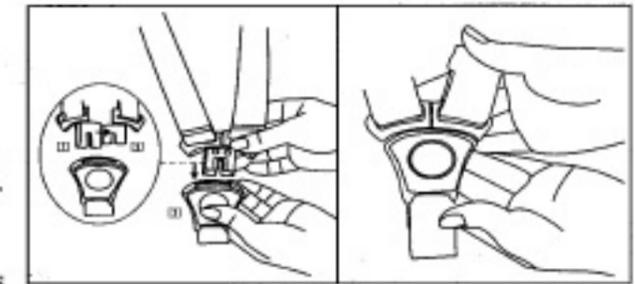

The harness height adjusting

1. Positioning of shoulder Straps/harness system.

Please note that there are 3 height slot positions for the shoulder straps. As your child grows you will need to move the straps to the next slot. The shoulder straps should be positioned so that they sit on top of your child's shoulders, not just on the chest. The diagram shows a correct shoulder strap position.

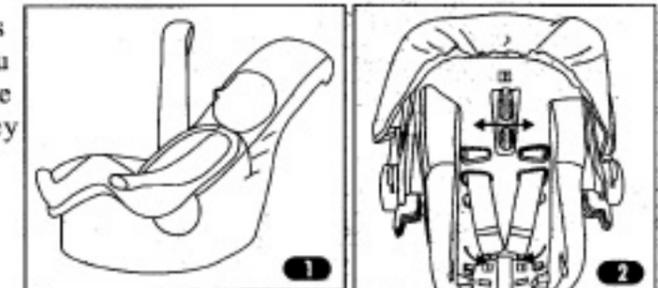

2. Check to ensure that the straps are correctly positioned. Do not allow harness straps to become twisted. Keep them flat against your baby's body.

Please follow the instructions below to adjust the height/positioning of the shoulder straps.

- (1) Remove the ends of the shoulder straps from the metal plate at the rear of the seat.
- (2) Pull the straps through to the front.
- (3) Re-insert the straps through the appropriate slots in the seat shell, Seat cover and shoulder pads.
- (4) Re-attach the loops on the shoulder straps to the slots on the metal plate. Test by pulling all straps.