BM3300


Full Colour Video Monitor


Congratulations

on purchasing your new VTech product. Before using this product, please read Important safety instructions.

This manual has all the feature operations and troubleshooting necessary to install and operate your new VTech product. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature rich VTech product.

What's in the box







- 14. Do not overload wall outlets or use an extension cord.
- shelf, stand or other unstable surfaces. 16. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product

Important safety instructions

When using your equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury, including the following:

- 1. Follow all warnings and instructions marked on the product.
- 2. Adult setup is required. 3. This product is intended as an aid. It is not
- a substitute for responsible and proper adult supervision and should not be used as such. This product is not intended for use as a
- medical monitor
- 5. Do not use this product near water. For example, do not use it next to a bath tub, wash bowl, kitchen sink, laundry tub or swimming pool, or in a wet basement or shower.
- 6 CAUTION: Use only the batteries indicated in this manual. There may be a risk of explosion if a wrong type of battery is used for the parent unit. Use only the supplied rechargeable battery for the parent unit. Do not dispose of batteries in a fire. They may explode. Dispose of used battery according to the information in The RBRC® seal.
- Use only the adaptors included with this product. Incorrect adaptor polarity or voltage can seriously damage the product. Baby unit power adaptor: Output: 6V DC 500mA Parent unit power adaptor: Output: 6V DC 500mA.
- The power adaptors are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.
- Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. 9. Use a damp cloth for cleaning. 10. Unplug the power cords before replacing
- batteries. 11. Do not cut off the power adaptors to replace them with other plugs, as this causes a
- hazardous situation 12. Do not allow anything to rest on the power cords. Do not install this product where the cords may be walked on or crimped.
- 13. This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or local power company
- 15. Do not place this product on an unstable table.

Cautions

and other obstructions

Overview

If you drill the holes into a stud, go to step 3.

If you drill the holes into an object other than a stud, insert the wall anchors into the holes. Tap gently on the ends with a hammer until the wall anchors are flush with the wall.



Place the baby unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the baby unit.



Place the baby unit on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the baby unit. Align the holes on the wall mount bracket with the screws on the wall, and slide the wall mount bracket down until it locks into place.

0 25°C @ Cam vtech



vtech User's manual

Before use


• This baby monitor is intended as an aid. It is not a substitute for proper adult supervision, and should not be used as such.

Test your baby monitor

You should test the baby monitor before initial use, and at regular times thereafter.

OCAUTION

• For hearing protection, make sure the parent unit is more than 1 metre away from the baby unit. If you hear any high-pitched noise, move the parent unit further away until the noise stops. You can also press VOL- on the parent unit to lower or mute the noise



- 1. Make sure your baby unit and parent unit are on.
- 2. The parent unit displays images from the baby unit.
- Speak towards the microphone of the baby unit. You will hear the sound at the parent unit.

• When the parent unit displays 🕻 No link to Camera, and the LINK LED light flash, move the parent unit closer to the baby unit (observe the minimum distance of 1 metre). You can also check if the baby monitor is connected to a live power socket and switched on.

• Increase the speaker volume of the parent unit if you cannot hear the sounds transmitted from the baby unit.


Positioning the baby monitor ()CAUTION

 Keep the baby unit out of the reach of your baby. Never place or mount the baby unit inside the baby's crib or playpen.

ONOTE

 $\mathbf{\Omega}$

- · To avoid interference from other electronic devices, place your baby monitor far away from devices such as wireless routers, microwaves, mobile phones and computers.
- 1. Place the baby unit more than 1 metre away from your baby



2. Place the parent unit more than 1 metre away from the baby unit.




3. Flip down the camera on the baby unit to adjust the angle according to your preference.




- ()CAUTION
- The default volume of your parent unit is level 4. If you experience high-pitched screeching noise from your baby monitor while positioning:
- Make sure your baby unit and parent unit are more than 1 metre apart, OR
- Turn down the volume of your parent unit.

Mount the baby monitor (optional) 0




• Check for reception strength and camera angle before drilling the holes

Place the wall mount bracket on a wall and then use a pencil to mark the top and the bottom holes as shown. Remove the wall mount bracket and drill two holes in the wall (7/32 inch drill bit).



Align the wall mount bracket and screws with the holes in the wall as shown. Tighten the screw in the middle hole first, so that the wall mount bracket position is fixed. You can tighten the other screw in the top hole.




Insert the screws into the holes and tighten the screws until only 1/4 inch of the screws are exposed.

-OR









2






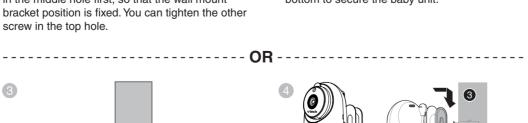




3

3







should never be placed near or over a radiator or heat registe

17. Never push objects of any kind into this product through the slots because they may touch dangerous voltage points or create a short circuit. Never spill liquid of any kind on the

product.

18. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorised service facility. Opening or removing parts of the product other than specified access doors may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when

the product is subsequently used. 19. You should test the sound reception every time you turn on the units or move one of the components.

20. Periodically examine all components for

damage. 21. Be aware of possible loss of privacy while using public airwaves. Conversations may be picked up by other nursery monitors, cordless phones, scanners, etc.

22. Children should be supervised to ensure that they do not play with the product.

23. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of

experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SAVE THESE INSTRUCTIONS

1. Use and store the product at a temperature between 0°C and 40°C.

2. Do not expose the product to extreme cold, heat or direct sunlight. Do not put the product close to a heating source.

3. Batteries should not be exposed to excessive heat such as bright sunshine or fire. 4. **Warning**—Strangulation

Hazard— Keep this cord out of the reach of children (more than 1 metre away). Do not remove this tag.

5. Never place the baby unit inside the baby's crib or playpen. Never cover

the baby unit or parent unit with anything such as a towel or a blanket.

6. Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible wireless routers, radios, mobile telephones, intercoms, room monitors, televisions,


personal computers, kitchen appliances and cordless telephones.


Operating range

The operating range of the baby monitor is up to 300 metres outdoors or 50 metres indoors. The actual operating range may vary depending on the environmental conditions and other interferences such as walls, doors

Baby unit overview








Install the battery

The parent unit runs on a rechargeable battery or AC power. To continuously monitor your baby, make sure you use both battery and AC power at the same time. With the battery alone, the parent unit can cordlessly run for a short time only.


PNOTES

- Use only the battery supplied with this product.
- The operating time for using the rechargeable battery is short. If you want to monitor your baby for a long time, we recommend you connect the parent unit to AC power
- If the parent unit will not be used for a long time, disconnect and remove the battery to prevent possible leakage

Install the battery as shown below.



• Make sure the label THIS SIDE UP is facing up while inserting the battery



Replace the battery

To replace the battery, pull out the battery compartment cover, and then lift up the battery. Follow the steps above to install the new battery.

1 Light sensor 2 Camera		
_		
3	Infrared LEDs	
4	 -/VOLUME/+ Press to adjust the speaker volume. It determines the talkback volume transmitted from your parent unit. 	
5	Microphone	
6	 ON/OFF LED light On when the baby unit is turned on and is paired to the parent unit. Flashes when the baby unit is not being viewed; or when the link to the parent unit is lost. 	
7	 ON/OFF switch Slide to turn the baby unit on or off. 	
8	Temperature sensor Speaker	
9		
10	Threaded socketFor wall mount installation use.	
11	Power Jack	
12	 PAIR Your baby unit and parent unit provided are already paired. 	


Connect and charge the battery

PNOTES

· Use only the power adaptors supplied with this product.

- The power adaptors are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if they are plugged into a ceiling, under-the-table or cabinet outlet
- Make sure the parent unit, the baby unit and the power adaptor cords are out of the reach of children

Connect the baby monitor

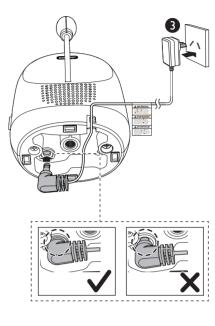



LCD display

viewing images.

speaker is on.

speaker is on.

MENU/SELECT

down.

Press to zoom in or out while

• Turn the volume up when the

While in a menu, press to scroll up,

While zooming, press and hold to

or to enter an item's sub-menu.

move the zoomed image up.

Turn the volume down when the

While in a menu, press to scroll

While zooming, press and hold to

move the zoomed image down.

Press to enter/exit the menu.

While in a sub-menu, press to

choose an item, or save a setting.

🕀 Zoom

œ

age of the battery. Battery Battery Action indicators status

Parent unit overview	6	 Whil the r

ile in a menu, press to choose next item on the left, or enter into the submenu, if any. While zooming, press and hold to move the zoomed image to the left. While in a menu, press to choose the next item on the right, or return to the main menu while in submenu. While zooming, press and hold to move the zoomed image to the right. 也 On/off Press and hold to power on. Press and hold again to power off. TALK Press and hold to talk to the baby unit. PATROL 9 10 LCD ON/OFF Press to turn the LCD screen on or off. Speaker 11 12 Power jack 13 Battery compartment cover 14 Stand

Charge the parent unit battery

When you have connected the parent unit and installed its battery for the first time or after power outage, the parent unit will power on automatically. The battery icon indicates the battery status (see the following table).

- The parent unit battery is fully charged after 11 hours of continuous charging.
- It takes longer to charge the battery when the parent unit is turned on. To shorten the charging time, turn the parent unit off while charging.
- The standby time varies depending on the volume level you set, your actual use and the

The battery icon is off and 10 displays.	No battery is installed but operates using AC power, or the battery has been installed incorrectly.	Install the parent unit battery. Charge without interruption (at least 30 minutes).
The screen displays Battery low at Parent Unit and I. The Iight flashes.	The battery has very little charge and may be used for only a short time.	Charge without interruption (about 30 minutes).
The battery icon becomes solid mm .	The battery is fully charged.	To keep the battery charged, connect it to AC power when not in use.

Parent unit lights

LINK	On when the parent unit is linked to the baby unit. Flashes quickly when the link to the baby unit is nearly lost.	
	On when the parent unit is connected to AC power, or the battery is charging. Flashes when the parent unit	
	battery is low and needs charging. Off when the parent unit is disconnected from AC power.	
TALK	On when the parent unit is talking to the baby unit.	
×	On when the speaker volume of the parent unit is turned off.	
Parent unit status icons		

Connection status Tull or Tul displays when strong signal strength is detected between the baby unit and the parent unit. Yu or Yu displays when moderate or low signal strength is detected between the baby unit and the parent unit. local set to the link between the link b the baby unit and the parent unit is lost Zoom ø Displays when the camera at the baby unit has zoomed in)* Night vision Displays when the baby unit has activated the night vision feature. Lullaby 53 Displays when a lullaby is playing. Talkback Ŷ Displays when talking back to the baby unit from the parent unit.

	 6-level sound indicator Displays the sound level when there is sound transmitted from the baby unit. II (1 to 2 bars) indicates low sound level detected by the baby unit. IIII (3 to 4 bars) indicates moderate sound level detected by the baby unit. IIIII (5 to 6 bars) indicates high sound level detected by the baby unit. 	Parent Ö
• € X	 Mute alert Displays when the parent unit speaker volume is set to off. 	
°For °C	 Real-time temperature Displays the real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. 57 °F or 14 °C). 	٩
	 Battery status → → → → → → → → → → → → → → → → → → →	5
9 -	 AC power without battery Displays when the parent unit is connected to AC power without the battery. 	
	 Speaker volume Displays the parent unit speaker volume level while adjusting. 	

	Brightness You can change the brightness of	messages	1
	the parent unit screen.	/No link to Camera	The baby unit is out of range or is turned off.
ŀ	Pairing baby unit The baby unit and parent unit provided are already paired.	/Battery low	The battery is empty and needs to be recharged.
	pairing baby unit can remove the paired baby	\bigotimes	Pairing or unpairing is complete.
You	screen off timer can set a specific time for the nt unit screen to switch off.	X	Pairing or unpairing is in progress.
	turn on the Temperature		Pairing or unpairing has failed.
unit beeps temperatu	on so that the parent whenever the room re detected by the alls outside the desired re range.	/Temperature too high or	detected by the baby unit is higher/lower than the
Lullaby You can Iullaby.	select, play, or stop a	/Temperature too low	desired temperature alert range.
		Coor Coor Coor Coo	The baby unit is unpairing from the parent unit.
		To	The parent unit is searching for baby unit.

aby unit is out of or is turned off. attery is empty and to be recharged. g or unpairing is ete. g or unpairing is in g or unpairing has mperature ed by the baby unit er/lower than the ed temperature alert

screen on again.

For parent unit:


turns on.

Pair new baby unit


You can pair new baby unit (BM3310; purchased separately) to your **BM3300** video monitor system.

• You can pair a maximum of four baby units to your parent unit. Each new baby unit must be paired to the parent unit before use. Make sure you power on the parent unit before pairing.

- 1. Press **MENU** when the parent unit is idle. 2. Press \blacktriangleleft or \triangleright to choose 2, then press \blacktriangle to select.
- 3. Press ∇ or \blacktriangle to choose an empty baby unit slot (^{cam}, ^{cam}₂, ^{cam}₃ or ^{cam}), then press **SELECT**. The parent unit screen displays \mathbb{Z}
- 4. Use a narrow-pointed object, such as a pen, to press PAIR on the bottom of the baby unit
- The ON/OFF LED light at the side of baby unit flashes quickly when pairing.

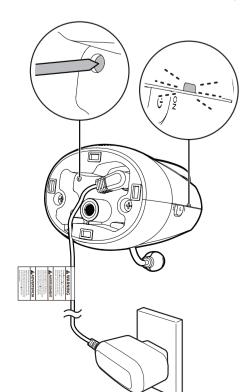

When pairing is successful, the parent unit screen displays @ and the LINK light turns on. The view of the newly paired baby unit in SINGLE-CAM mode will be shown on the parent unit. The ON/OFF LED light on the new baby unit remains on.



CNOTES

- If pairing fails, the screen displays ▲. Try the pairing process again.
- · Only one baby unit can be paired at a time.

General product care

To keep this product working well and looking good, follow these guidelines

- Avoid putting it near heating appliances and devices that generate electrical noise (for example, motors or
- fluorescent lamps). • DO NOT expose it to direct sunlight or moisture.
- · Avoid dropping the product or treating it roughly. • Clean with a soft cloth.
- DO NOT immerse the parent unit and the baby unit in water and do not clean them under the tap
- DO NOT use cleaning spray or liquid cleaners. · Make sure the baby unit and parent unit are dry
- before you connect them to the mains again.

Storage

When you are not going to use the baby monitor for some time, remove the rechargeable battery from the parent unit. Store the parent unit, the baby unit and the adaptors in a cool and dry place.

Frequen	tly asked questions	tł	Vhy does ne parent nit beep?
the soother. If yo	uestions most frequently asked about ou cannot find the answer to your e contact TecHelp on 1300 369 193.		
Why does the baby monitor not respond normally?	 Try the following (in the order listed) for a common cure: 1. Disconnect the power to the baby unit and the parent unit. 2. Remove the batteries in the parent unit. Then install the batteries again. 3. Wait a few seconds before connecting power back to the baby unit and the parent unit. 4. Turn the baby units and the parent unit on. 5. Wait for the parent unit to synchronise with the baby unit. Allow up to one minute for this to take place. 	li b fl tr u	he ON/OFF ght on the aby unit ashes and he parent nit displays
Why don't the power-on lights on the baby unit or the parent unit go on when I switch	Perhaps the parent unit is not connected to the power. Insert the appliance plug into the parent unit and put the adaptor in a wall socket. Then <u>press and hold</u> to switch the parent unit on and to establish connection with the baby unit.	a	have ccidentally
the units on?	Perhaps the baby unit is not connected to the power. Insert the appliance plug into the baby unit and put the adaptor in a wall socket. Then slide the ON/OFF switch to ON to switch the baby unit on and to establish connection with the parent unit.		npaired my aby unit.
Why doesn't my parent unit charge while connected to	Make sure the battery is installed. You may have used the battery for a long time. Replace with a new		
AC power? Why is my screen in black and white?	The screen is in black and white during night-time or in a dark room when the night vision feature is activated. This is normal.	l s c	Vhy don't hear a ound/Why an't I hear ny baby cry?
Why do I get glare or a blurry display on my screen when viewing my baby at night?	During night-time or in a dark room, the surroundings and other interfering factors, like lights, objects, colours and backgrounds may affect the image quality on your parent unit screen. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and a blurry display.	e C V Ic n th a	Vhy can't I stablish a onnection? Vhy is the onnection ost every ow and hen? Why re there
Why does the baby monitor	The parent unit and baby unit may be too close to each other. • Move the parent unit away from		ound nterruptions?

Why does the baby	The parent unit and baby unit may be too close to each other.
monitor produce a high-pitched noise?	 Move the parent unit away from the baby unit until the noise stops; OR Turn down the volume of your
	parent unit.

The baby unit may be out of range. Move the parent unit closer to the baby unit (but not less than parent beep? 1 metre) If the parent unit is powered by the IMPORTANT provided battery, it may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit for up to 11 hours. The temperature of your baby's room may be too high or too low. **ON/OFF** | Follow below steps to pair the t on the baby unit. Make sure both parent unit and baby unit are on before v unit hes and pairing. parent Press MENU when the parent displays unit is idle. Press \blacktriangleleft or \blacktriangleright to choose \square , then press \blacktriangle to select. Press $\mathbf{\nabla}$ or \mathbf{A} to choose an empty baby unit slot, then press SELECT. The parent unit screen displays 🖾 Use a narrow-pointed object, such as a pen, to press PAIR on the bottom of the baby unit • The ON/OFF LED light at dentally the side of baby unit flashes aired m quickly when pairing. When pairing is successful, the parent unit screen displays ight and the **LINK** light turns on. The view of the newly paired baby unit will be shown on the parent unit. The ON/OFF LED light on the baby unit remains on If pairing fails, the screen displays 🕼. Try the pairing process again. / don't The parent unit speaker volume may be too low or off. Press VOL+ ar a nd/Wh o increase the volume. i't I hear baby cry

range. Move the parent unit closer to the baby unit (but not less than Serial number

metre) Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these lectronic devices as possible.

The baby unit may be out of

on. turns off

or off You can turn the parent unit screen on or off without switching the parent unit off. You can still hear sound from the baby unit.

• Press LCD ON/OFF on the parent unit to turn the screen off

For baby unit: unit.

Using the baby monitor

Power the baby unit on or off

• Slide the **ON/OFF** switch up to turn the baby unit on. The ON/OFF LED light turns

• Slide the **ON/OFF** switch down to turn the baby unit off. The **ON/OFF** LED light

Power the parent unit on or off

 Press and hold Φ to turn the parent unit on. The screen turns on. • <u>Press and hold</u> 0 again to turn the parent unit off. The screen turns off.

Turn the parent unit screen on

· Press any key on the parent unit to turn the

Adjust speaker volume

• Press VOL+/VOL- on the parent unit to adjust the speaker volume.

• When the parent unit speaker volume is set to zero, 🐗 appears on the screen and the 🖏 light

The baby unit speaker volume determines the talkback volume transmitted from your parent

• Press +/VOLUME/- on the baby unit to adjust the speaker volume.

Customer service and

product warranty

Please retain this booklet with your sales receipt as proof of the date of purchase

Customer Service

If you require assistance in operating this product, please call the TecHelp Information Line on 1300 369 193 or contact VTech by e-mail at: tcpsupport_au@vtech.com

Voluntary Product Enquiry

In addition to your Statutory Rights and subject to the conditions below, VTech warrants that this product will be free from any defect in materials or workmanship under conditions of normal use for a period of 24 months from date of purchase.

VTech does not warrant that the product will be free from defects if defects are caused by an accident, misuse, abuse, improper installation or operation, vermin infestations, lack of reasonable care, unauthorised modification, loss of parts, tampering or attempted repair by a person not authorised by VTech; or where the product has been damaged by lightning or a mains power surge. To make a claim under this Voluntary Product Warranty you must call the TecHelp Information Line on 1300 369 193 or contact VTech by e-mail at: tcpsupport_au@vtech com where a Customer Service Representative wil inform you of the product return process. You will need to ensure that:

 You provide proof of purchase: Your product is suitably packaged (original packaging is not required); and

· You have included all components from the original purchase.

For your records Date of purchase

Place of purchase:

For Voluntary Product Warranty purposes, proof of purchase is required so please keep your receipt.

The benefits conferred by this Voluntary Product Warranty are in addition to other rights and remedies that are available to you under law. which cannot be excluded. The processes for this Voluntary Product Warranty in no way limit your rights which arise as a result of your Statutory

Adjust LCD brightness You can change the brightness of the parent

unit screen from Level 1 to Level 5. The LCD brightness is preset to Level 3.

- 1. Press **MENU** when the parent unit is idle.
- 2. Press \triangleleft or \triangleright to choose \mathfrak{Q} , then press \blacktriangle .
- 3. Press $\mathbf{\nabla}$ or \mathbf{A} to choose the desired level of brightness, then press **SELECT** to confirm your selection.

Zoom

You can zoom in while viewing images from the baby unit.

- Press ∇ or \blacktriangle to move the zoomed image up or down.
- Press ◀ or ► to move the zoomed image left or right.
- Press @ again to zoom out.

Talk

You can use the **TALK** function on the parent unit to comfort your baby.

- 1. Press and hold TALK on the parent unit. The TALK light turns on.
- 2. Speak towards the microphone on the parent unit. Your voice is broadcast to the babv unit
- 3. Release the **TALK** key to stop the broadcast. The TALK light goes off.

Lullaby

You can play the lullabies on the baby unit from the parent unit. On the baby unit, you can control the volume level of the lullabies.

Playing lullabies

- 1. Press MENU when the parent unit is idle.
- 2. Press \triangleleft or \triangleright to choose \square , then press \blacktriangle .
- 3. Press ∇ or \blacktriangle to choose a lullaby, or choose to stop playing.
- 4. Press SELECT to confirm your selection.

Volume level control on baby unit

- · Press VOL+ to increase the volume level of the lullaby on the baby unit. • Press VOL- to decrease the volume level of
- the lullaby on the baby unit.

PNOTE

 The lullaby will stop when you start using the TALK function on the parent unit to comfort your baby.

Your baby unit monitors the temperature of your baby's room with its built-in temperature sensor. If the detected temperature is out of the

preset temperature range, the parent unit will

Monitor the temperature

display an alert message

Set temperature range You can set the desired room temperature alert range. The minimum temperature can be set between **50** °F (**10** °C) and **76** °F (**24** °C). The maximum temperature can be set between 77 °F (25 °C) and 102 °F (39 °C).

- 1. Press **MENU** when the parent unit is idle.
- 2. Press ◀ or ► to choose 💩, then press ▲.
- 3. Press ∇ or \blacktriangle to choose \mathbb{P} , then press SELECT.
- 4. Press $\mathbf{\nabla}$ or \mathbf{A} to choose \mathbf{M} or \mathbf{M} , then press SELECT.
- 5. Press $\mathbf{\nabla}$ or \mathbf{A} to choose the desired minimum or maximum temperature, then press SELECT to confirm your selection.

Temperature alert tone

You can turn the temperature alert tone on so that the parent unit will emit an alert tone if the detected temperature is out of range

- 1. Press **MENU** when the parent unit is idle.
- 2. Press \blacktriangleleft or \blacktriangleright to choose \clubsuit , then press \blacktriangle . 3. Press ∇ or \blacktriangle to choose \clubsuit , then press SELECT
- 4. Press ∇ or \blacktriangle to choose \square or \square , then press SELECT to confirm your selection.

Temperature format

You can choose to display the temperature in Fahrenheit (°F) or Celsius (°C).

- 1. Press **MENU** when the parent unit is idle.
- 2. Press \blacktriangleleft or \blacktriangleright to choose \clubsuit , then press \blacktriangle .
- 3. Press $\mathbf{\nabla}$ or \mathbf{A} to choose $\mathbf{I}_{\mathbf{k}}^{\mathbf{k}}$, then press SELECT
- 4. Press \triangledown or \blacktriangle to choose \square or \square , then press SELECT to confirm your selection.

VTech Telecommunications (Australia) Pty Ltd ABN

Address: 24 Gilby Road, Mount Waverley 3149 IMPORTANT NOTE: THIS IS NOT A PRODUCT

FOR PRODUCT AND WARRANTY SUPPORT WARRANTY

Email address: tcpsupport_au@vtech.com

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Technical specifications	
Frequency control	Crystal controlled PLL synthesizer
Transmit frequency	Baby unit: 2402 - 2478.5 MHz Parent unit: 2402 - 2478.5 MHz
Channels	52
Maximum RF power	20dBm
LCD	2.8" Colour LCD (WQVGA 320x240 pixel)
Nominal effective range	Actual operating range may vary according to environmental conditions at the time of use.
Power requirements	Parent unit: 3.6V Ni-MH battery Baby unit power adaptor: Output: 6V DC @ 500mA Parent unit power adaptor: Output: 6V DC @ 500mA

Disposal of batteries and product



The crossed-out wheelie bin symbols on products and batteries, or on their respective packaging, indicates they must not be disposed of in domestic waste as they contain substances that can be damaging to the environment and human health.

The chemical symbols Hg, Cd or Pb. where marked, indicate that the battery contains more than the specified value of mercury (Hg), cadmium (Cd) or lead (Pn) set out in Battery Directive (2006/66/EC).

The solid bar indicates that the product was placed on the market after 13th August, 2005.

Help protect the environment by disposing of your product or batteries responsibly



This Voluntary Product Warranty is given by: 70 136 672 627

RETURN OR SERVICE ADDRESS – PLEASE CONTACT TECHELP BY PHONE OR EMAIL NO LIABILITY WILL BE ACCEPTED BY VTECH FOR PRODUCTS RETURNED TO THIS ADDRESS UNDER THIS VOLUNTARY PRODUCT

Phone number: 1300 369 193

Statutory Rights