


Instruction Booklet

BABY CAR SEAT

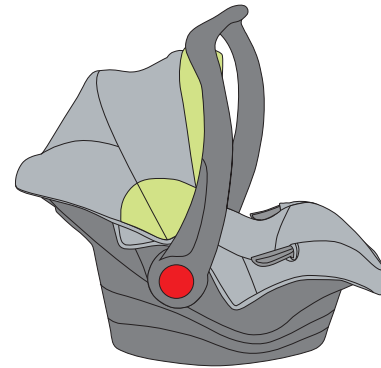

MODEL NO: SCB750

Keep this booklet in a safe place for future reference

Note: Colour and features of product may differ from the diagrams shown

BABY CAR SEAT



1

Instruction Manual

Thank you very much for purchasing of this car seat. Before use the car seat, please read the instruction booklet carefully.

The car seat is a safety product and is only safe when used in accordance with the instruction. If you have any questions when using the car seat, please feel free to contact us.

Contents

1.Scope of application.....	2
2.Installing with three-point safety belts (universal-type).....	3
3.Adjustment.....	4
3.1 Handle adjustment.....	5
3.2 The adjustment of headrest and shoulder strap.....	6
3.3 Loosen the strap.....	8

Inspection card


- 1.integrity check/ok
- 2.Function check/ok
 - the structure of seat adjustment check/ok
 - the adjustment of seat belts check/ok
- 3. Quality check/ok
 - the car seat check/ok
 - fabric check/ok
 - plastic check/ok

- I have inspected the baby car seat; I guarantee that the products sells to above customers are complete and can work well.
- Before buying, I have got enough information about the product and its function; and got the instructions offered from seller.

Purchasing Date: _____

Buyer signature: _____

Seller: _____



10. Warranty card

Name:

Post code:

City:

Telephone NO. (Including the area code)

Email:

Product Name:

Model No:

Color:

Accessories:

3.4 Secure the baby with safety belt.....	9
3.5 Tighten the safety strap.....	10
3.6 Correctly secure the baby with safety belt.....	11
4. Installation in the vehicle	11
4.1 Fit the car seat in the vehicle.....	13
4.2 Checklist for installing the car seat.....	15
5. Canopy usage	17
6. Safety instructions.....	18
6.1 Safety belt buckle	18
6.2 Cleaning instruction	20
6.3 Remove the fabric cover.....	21
6.4 Install the fabric cover.....	23
7. Connect with stroller	23
8. Waste treatment.....	24
9. Car seat Group I.....	24
10. one-year warranty period	24
11. Warranty card.....	26

1. Scope of application.



Suitable for infant from newborn to 13 kg.

The car seat can be only altered by the manufacturer.

2. Installing with three-point safety belts (universal)



Please follow the instructions below

Place car seat forward facing on vehicle seat	×
Place car seat REAR FACING on vehicle seat.	✓
Two-point seat belt	× (fig.1)
Front passenger position	× (fig.2)
Two sides of rear passenger position	✓
Middle of rear passenger position	× (fig.3)

Note: The rule would differ in some countries



Warning:

- ① When the accident occurs, use the two-point seat belts will greatly increase the risk of the baby.
- ② Don't place car seat on any seat content airbag.
- ③ Always use the three-point safety belt.



No warranty is given if:

- The natural phenomena in the process of using, and the damage caused by excessive pressure.
- The damage caused by the use of improper or incorrect.

The warranty Terms:

Fabrics: Where the defect is discolouration, damage to the fabric or watermarks due to washing that has not been in accordance with the instruction given in any manual or instructions supplied with this products, exposure to rainwater, or exposure to sunlight. The warranty is not given.

Buckle:

The malfunction of buckle is usually due to the dirt and dust.

If it happens, please clean the buckle according to the instruction.

In case of quality problem, please contact local retailer directly. When settle the claim, the depreciation rate will also be taken into account. Please follow our general terms and conditions, this is also applies to the local retailers.

7. Waste treatment

Please obey your country's rules and regulations for disposal, such as packing, the waste materials, and the recycled cardboard.

Packaging disposal	Put into the container of recycling cardboard
The waste of parts	
Fabric cover	Rubbish or burning
Plastic	According to the parts of the relevant containers on the label
Metal	Put into the recycled metal container
Ribbon	Put into the recycled polyester container
buckle	Rubbish

8. The baby car seat Group I.

baby car seat	Group	baby's height
• ECLIPSE • KING PLUS • DUO PLUS • SAFEFIX PLUS	I	9-18kg

9. One-year warranty period.

The warranty period starts from the date of purchasing and is valid for a period of one -year. As the evidence, please fill in the warranty card, and keep it within the warranty period. At the same time, please keep the sales documents, and the other related documents. In case of any defects, the owner is required to return the car seat and warranty card to the retailer or manufacturer. The manufacturer is not liable for any damages other than those on products supplied, and the return of the product need to be clean and tidy.

Warning: EXTREME DANGER!



Airbag inflates rapidly and can throw a rear-facing child restraint into seat back with a great force, which can injure child.



Don't use a rear-facing car seat on front passenger seat where a passenger side airbag is fitting.(fig.3)


Please follow the instruction to use the baby car seat in vehicles

3. Secure the baby



For your baby's safety:


- Always secure your baby with safety belt in the car seat.
- Never leave your child unattended in the car seat, either in /out of car or higher position, such as table , diaper changing table.
- In the course of activity, it doesn't allow the other objects enmesh the bottom of the seat belt, Such as automatic doors , elevator
- Warning! If the plastic of car seat in the sun light for a long time, the high temperature will hurt your baby. So please protect the baby and carrycot against direct sun light. For example, you can put the light-colored fabric cover on the car seat.
- Never use the car seat without fabric cover.
- During the using, the car seat can be only fixed in one position, that is to say your baby must always be in a declining position. The advantage is that you can always take out the baby from the car seat to avoid the discomfort of baby's spine. Therefore, we recommend that you can often take out your baby in a long -distance travel or in the outdoors.
- Headrest can make the little baby more comfortable.




3.1 Handle adjustment.

Handle can be adjusted to three positions:

- ✎ Step1: press the button which on the both sides of the handle at the same time. (fig.1 as shown)
- ✎ Step2: press button (fig.1) as shown on the handle forwards or backwards into the desired position. (A.B.C three position)



A




B

5


3.1.1 suitable for travelling and transportation in the vehicle

Warning! When you lift the car seat, please make sure the handle(fig.2) is locked.




5.4 Re-install the fabric cover

- ✎ The simple procedure is to do it in a opposite way mentioned in point 6.3.
- ✎ Note: ensure that the belt is not twisted.




1)

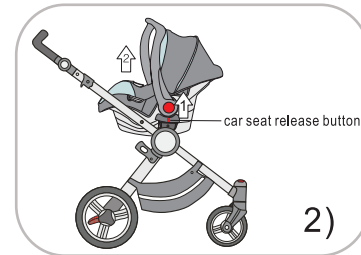


2)

6.connect with stroller

1. Before mounting the car seat, please take out the seat of the stroller!
2. Installing the adaptor on the stroller: first install the adaptor on the car seat. and then install the car seat on the stroller. Details on the following. Stand in front of the stroller and take one car seat adaptor at a time and insert the adaptor into the stroller hinge as shown. Push on the adaptor until you hear a “chick” which indicates the adaptor has locked in .
Releasing: 1. press the releasing button on sides of car seat, and pull up as shown.




✎ Step7: Take out the fabric cover in front of the car seat from the shell.



✎ Step8: Take out lap sections of the adult safety belt from both lap belt guides (fig. 16) as shown

✎ Step9: Pull down block (fig.26,27) on both two sides of fabric cover, then separate the whole cover from the shell

C



3.1.2 when the car seat is used out of the car, please remember to adjust the handle position, So that you can place the car seat with security and stability.

3.2 The adjustment of headrest and shoulder strap


Adjust the headrest (fig.3) and shoulder straps (fig.4) properly as shown, make sure the child sits in the proper position in the car seat.

The safety shoulder strap must be threaded through the slots nearest to the shoulders of the child

Adjust the height of headrest according to the baby's height (fig. 3)

✎ Press the red button to open the buckle of the safety belt as shown (fig. 5)






✎ There are four sets of slots on the shell (fig. 6,7,8,9.), open the belt buckle, pass the strap (fig.10) through the slots to fit the child's height.



✎ There are two sets of slots on the headrest (fig.11,12), you can adjust the shoulder straps according to desired height.




- The plastic can be washed with the soft detergent, it can't wash with the corrosive substances, such as decolourant.
- The safety belts can be took out and washed with the cold water detergent.


Note: Don't take the metal sheet out of the safety belt

5.3 Remove the fabric cover

- ✎ Step1: Take out the canopy. (Point 5)
- ✎ Step2: Release the safety belt as long as possible.
- ✎ Step3: Press the red button and open the buckle. (fig.5)
- ✎ Step4: Pull the buckle out of the bottom of car seat (Point 6.1)
- ✎ Step5: Separate the tongue sections from the shoulder pads. And pull it out from slots on the headrest ,then remove the headrest.



- ✎ Step6: pull out the tongue sections (fig.10) from fabric cover and then from slots (fig. 6/7/8/9).



3.Reinstall the buckle

- ✎ Push the metal sheet downwards through the fabric cover and slot(fig.25), pull to check whether it is installed into its place

Malfunction:

Both tongue sections(fig.10) can not insert into the buckle(fig.5)

Correction:


- ✎ Press the red button and it will not lock the buckle

5.2 Cleaning instruction

Only use the fabric cover from manufacturer, the fabric cover is very important to the right function of the car seat system.

⚠ The car seat can't be used without the fabric cover

The fabric cover can be took out and washed in warn water at 30°C. Please follow the washing instruction. If the temperature exceeds 30°C , the cover may be faded. If it wrings or tumbles dry, the fabric may be separated with the lining



- ✎ Put the strap(fig.10) through the harness pads as shown(fig.13)



3.3 Loosen the strap


- ✎ Press the button as shown(fig.11) and pull the shoulder straps as shown (fig. 4).



3.4 Secure the baby with safety belt

- ✧ Step1: loosen the strap. (fig. 3.3)
- ✧ Step2: press the red button to open the belt buckle(fig.5).
- ✧ Step3: put the baby into the car seat.
- ✧ Step4: Adjust the shoulder strap to fit the child.

Warning! Never distort or exchange the shoulder straps.



- ✧ Step5: Slide both tongue sections together (fig.10)




- After release the buckle, it can not lock again .
- When insert the buckle, you do not hear the sound of “click”.
- It seems to be difficult to insert the buckle.
- When it meets the strong impact, the buckle will be opened.

Correction:

Clean the buckle component, and make it to be used normally

1.Release the buckle of safety belt.

- ✧ Open the buckle (fig.5) and then press the red button.
- ✧ Release the safety belt (Point 3.4)



- ✧ Put the metal sheet(fig.24) through the slot(fig.23) in the button of car seat, then you can take out the whole buckle system.

2.Clean the buckle.

- ✧ Put the buckle dipped in warm water with detergent at least one hour, then wash and dry thoroughly.

5. Safety instructions.

For safety


- If the car was in an accident with the speed reach up to 10km/h, the car seat may appear little obvious damage.
 - In this case, it's necessary to replace the car seat, and disposal it properly according to the requirements of the instruction. (point 8)
 - Inspect all important components regularly to ensure that all mechanical parts can be worked correctly.
 - Ensure that no part of the seat or seat belt is trapped in a door or a folding seat to avoid the damage or destruction.
- Once the car seat is damaged (such as falling), it must be sent back to the supplier for re-test.

5.1 Safety belt buckle

The function of the safety belt buckle is very important for protecting the baby. And its malfunction maybe come from the dust.

Malfunction:


The buckle can not release when you press the red release button,




- ✎ Step6: Insert both tongue sections in the buckle (fig.5), and you will hear a click locking them in position.
- ✎ Step7: Pull the adjuster belt at the front of shell tight to ensure that the child is firmly secured with the safety strap.

3.5 Tighten the safety strap

- ✎ Pull the adjuster belt at the front of shell tight.
Note: Tighten the strap towards you, not upwards or downwards.
- ✎ **Attention:** The safety strap (fig.14) should be fit correctly according to the instruction and ensure no part of the seat or seat belt is trapped in a door or a folding seat when driving.



3.6 Correctly secure the baby with safety belt


 **Considering the safety of your baby, please check the following:**


- Baby is firmly secured with the safety belt and make sure it is comfortable for baby.
- The shoulder straps can be adjusted correctly.
- The shoulder straps should not be twisted.
- Insert both tongue sections (fig. 10) in the buckle (fig. 5).




4. Installation in the vehicle




 Don't leave the child in the seat unattended at any time.

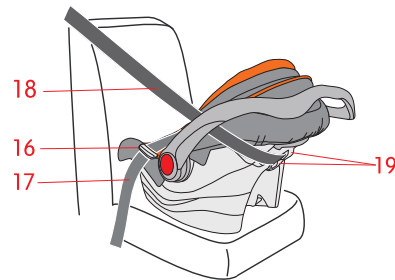

- Place the diagonal belt (fig. 18) in the diagonal seat belt guide (fig. 19) at the back of the seat.




- The buckle (fig. 15) can't be placed before the lap belt guides (fig. 16)
- The belt must be tightened and not be twisted.



Release the car seat.

- ✎ Step1: Take out the diagonal belt (fig.18) from the diagonal seat belt guide (fig.19) at the back of the seat.
- ✎ Step2: release the buckle of the seat belt (fig.15) and take out the lap section of the adult safety belt (fig.17) from the lap belt guides (fig.16).



4.2 Checklist for installing the car seat

 For the safe of your baby, please check the following:



- The car seat must be installed rear facing.
- The car seat can be only fitted into the passenger seat without air bag.
- The car seat can be only installed with three-point seat belts.
- Insert the lap section of the adult safety belt (fig.17) through the lap belt guides (fig.16).



For the safety of the driver and all the passengers

In case of emergency brake or an accident, the passengers or objects may cause injury by the other passengers in the vehicle, please check the following notes regularly.

- If your car has a folding rear seat, ensure that it is correctly latched in its upright position.
- All heavy and sharp objects should be protected in the vehicle, such as the object of the luggage rack.
- All of the people in the car must wear the seat belts.
- When the car seat is not in use, it should be fastened into the car with seat belt.

Maintenance for your car

- Some car seat's cover is made of sensitive fabric, such as velour and leather. The seat fabric would be worn after using the car seat, you can put a blanket or towel in the bottom of the car seat to prevent such situation arise.





4.1 Fit the car seat in the vehicle

The car seat should be fit into the passenger seat of a car with a lap and diagonal seat belt as following instruction:

- ✦ Step1: Push the car seat facing rearward firmly against the backrest of the car's seat (the baby face to the seat.)
Tip: If the car seat isn't tight firmly, you can put a blanket on the bottom of car seat to adjust the seat angle.

- ✦ Step2: Pull the seat belt and fit it with the car seat
- ✦ Step3: fasten the seat belt (fig.15).
- ✦ Step4: Insert the lap section of the adult safety belt (fig.17)through the lap belt guides(fig.16).
Note: The belt must not be twisted.
- ✦ Step5: Tighten the lap belt by pulling the diagonal belt.
Note: when you install the car seat, the buckle (fig.15) can't be placed before the lap belt guides(fig.16)(the correct position is as picture shown).



- ✦ Step6: Tighten the diagonal belt by pulling as arrow shows(fig.18).
- ✦ Step7: Place the diagonal belt(fig.18) in the diagonal seat belt guide(fig.19) at the back of the seat.

Note: The belt must not be twisted.

- ✦ Step8: Tighten the diagonal belt(fig.18)