


Edinburgh Child Booster Seat

Model 100227-79

NOTICE

1. This is a Universal child restraint, it is approved to ECE Regulation 44.04 for general use in vehicles and will fit most, but not all, vehicle seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a Universal child restraint for this group.
3. This child restraint has been declared Universal under more stringent conditions than those applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

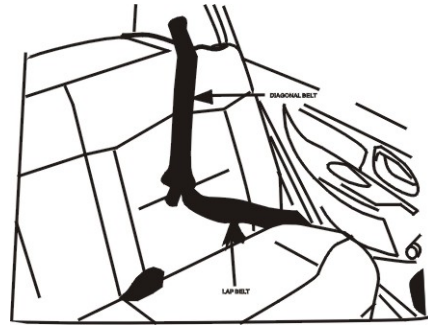


Your child seat can be used with a 3 point lap and diagonal seat belt in either the front passenger seat or rear passenger seat.

Place the seat cushion on your vehicle seat ensuring it is firmly against the vehicle seat backrest.

SAFETY WARNINGS

1. **PLEASE READ THOROUGHLY BEFORE COMMENCING INSTALLATION AS AN INCORRECT INSTALLATION COULD BE DANGEROUS.**
2. Your seat cover should not be replaced with any other than the one manufactured or recommended by the retailer. cover constitutes an integral part of the seat safety performance
3. Always push the seat cushion firmly against the car seat backrest as shown in these instructions.
4. Parents should not under any circumstances use any child car seat on a passenger seat fitted with an airbag
5. Do not add to or modify this product in any way.
6. Never use this product if it has been in an accident or if it has become badly worn.
7. Do not leave a child in the seat unattended at any time.
8. Ensure that no part of the seat belt is trapped in a door a folding seat. If your car has a folding rear seat ensure that it is correctly latched in its upright position.
9. Car interiors can become very hot when left standing in the direct sunlight- it is therefore recommended that the child seat, when not in

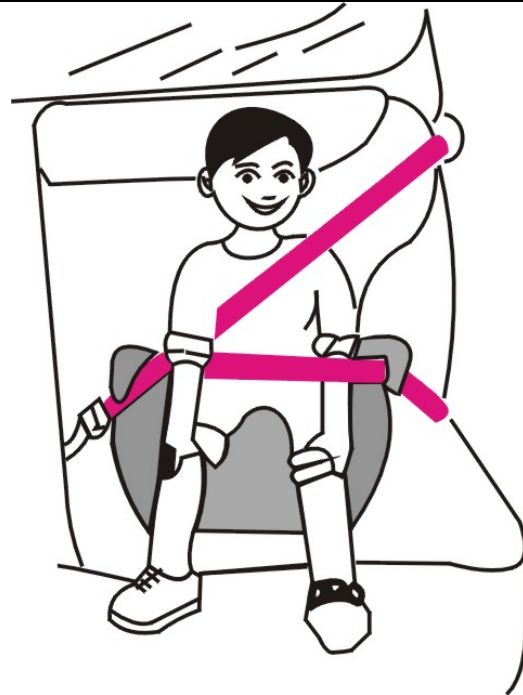

Sit your child on the seat cushion, then position the lap and diagonal seat belt around your child. Clip the seat belt tongue into the buckle. Position your child comfortably with his or her back against the vehicle seat backrest and remove all slack from the seat belt.

use, is covered by a towel etc. This prevents components, particularly those attached to the child seat, becoming hot and burning the child.


10. Care should be taken not to twist the vehicle seat belt webbing in anyway other than shown in the instruction diagram
11. . It is important that the lap portion of the seat belt is positioned as low down as possible towards the thighs – not around the tummy. Ensure no slack webbing is present .A loose belt can be dangerous
12. Luggage and other heavy or sharp objects should be secured in the car .Loose objects are liable to cause injury in the event of accident.

Only suitable if the vehicle is fitted with 3-point static, 3-point retractor safety belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

IMPORTANT

A – For smaller children (15-25kg) the diagonal belt should be routed under the armrest.

15-25kg

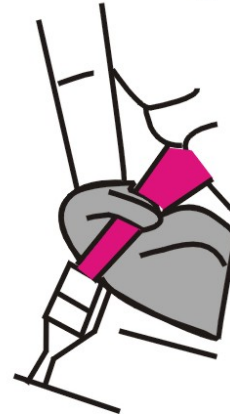

IMPORTANT NOTES

1. This is a child safety seat for use by children 15 – 36 kg in weight (3-11yrs) and is approved for use in front or rear seats with a 3 point static or 3 point retractor safety unit.
2. Do not allow your child seat to come into contact with corrosive substances e.g; battery acid.
3. **EMERGENCY RELEASE:**In an emergency, release your child by pressing the red button on the seat belt buckle.
4. Keep these fitting instructions in a safe place where they can easily be found.
5. If you travel with passengers using both front and rear seats the lighter occupants should be in the rear and heavier occupants in the front of the vehicle.
6. When the child seat is not in use, it is recommended that it is fastened into the car with a seat belt to avoid it being thrown about in the event of accident.

B – for larger children (22 – 36kg) the diagonal belt should be routed over the armrest.

22-36kg

