


# Instruction Manual

Group 0+

## EDINBURGH INFANT CAR SEAT

Suitable for Child from birth to 13kg  
( No older than approx. 15 months )

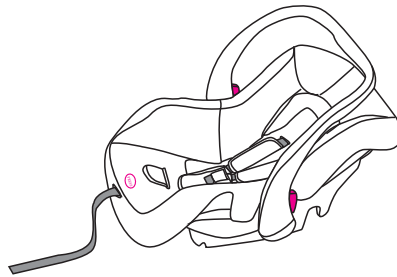

### NOTICE

1. This is a Universal child car seat; it is approved to ECE Regulation 44.04 for general use in vehicles and will fit most vehicle seats.
2. The best fit is if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting this Universal child restraint for this group.
3. This child restraint has been declared Universal under more strict conditions than those applied to earlier designs which do not carry this notice.
4. If you are in doubt, please consult either the child restraint manufacturer or the retailer.

Only suitable if the vehicle is fitted with 3-point static, 3-point retractor safety belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

#### WARNING

DO NOT place rear-facing child seat on front seats with airbags.

**IMPORTANT! KEEP THIS BOOKLET IN THE PLACE PROVIDED ON THE CHILD RESTRAINT**

## Contents

NOTES .....	2
SAFETY INSTRUCTIONS .....	3
PARTS AND INTERIOR EQUIPMENT .....	4
ADJUSTING THE SHOULDER HEIGHT .....	4
ADJUSTING AND USING HARNESS .....	5
SECURING THE INFANT CARRIER .....	6
ADJUSTING THE HANDLE.....	8
CANOPY ASSEMBLY .....	9
CLEANING INSTRUCTIONS.....	10
CUSTOMER SERVICE.....	10

NOTE: illustrations may vary from model supplied

## NOTES

1. Please read through this instruction carefully before using the baby car seat for the first time. The instruction can be retained on the baby car seat for its life period in the case of built-in restraints, and take good care of it for reference in the future.

Applicability:

**The baby car seat is suitable for weight categories 0+, 0-13kg (No older than approx. 15 months)**

### WARNING


**DO NOT place rear-facing child seat on front seats with airbags.**



**Group 0+: Birth -13kg**

NOTE: The recommended use of this car seat is 10 years from manufacturing date.


2. Your child seat can only be installed **rearward facing** (in the direction opposite the one in which you are travelling) with a lap and diagonal seat belt passenger seats.

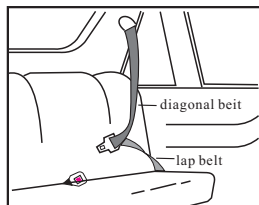

## SAFETY INSTRUCTIONS

1. PLEASE READ THOROUGHLY BEFORE COMMENCING INSTALLATION, AS AN INCORRECT INSTALLATION COULD BE DANGEROUS.
2. DO NOT UNDER ANY CIRCUMSTANCES USE THIS CHILD RESTRAINT ON A PASSENGER SEAT EQUIPPED WITH AN AIRBAG.
3. The child restraint must only be installed in the rearward facing position.
4. This child restraint can only be installed using a three-point vehicle belt.
5. Do not leave a child in the seat unattended at any time.
6. Never use the child restraint without securely fastening the harness correctly and never attempt to use it without fastening it into the vehicle as described in these fitting instructions.
7. Do not add or modify this product in any way.
8. Never use this product if it has been in an accident. Discontinue use if any parts are damaged or show signs of wear.
9. It is important that the vehicle seat belt is routed correctly and the child restraint is tightened down onto the vehicle seat, as firmly as possible.
10. The child restraint must always be used with the seat cover supplied by the manufacturer as this is an integral part of the seat's safety features.
11. At all times protect the child restraint against direct sunlight otherwise the high temperatures may burn or harm your child. Use the canopy or cover with a towel.
12. ALWAYS INSTALL THE HANDLE OF THE RESTRAINT FLUSH AGAINST THE REAR SEAT AND ENSURE THE CAPSULE IS LEVEL. Use a rolled up towel under the capsule base if necessary to achieve the correct level.
13. In the event of an emergency, it is important that the child can be released quickly. This means that the buckle is not fully tamperproof and therefore your child should be persuaded never to play with the buckle.
14. Luggage and other heavy objects should be secured in the car. Loose objects are liable to cause injury in the event of an accident.
15. Never place the child restraint on a raised surface such as a table or work surface.
16. When the child restraint is not in use, it is recommended that it is fastened into the vehicle seat belt to avoid being thrown around in the event of an accident.
17. In the event of an emergency, your child can be released quickly by pressing the red button on the harness buckle.
18. This restraint can be used for children of 0-13kg in weight and is used in conjunction with a 3-point lap and diagonal safety belt in the rear-facing position only.

### PARTS AND INTERIOR EQUIPMENT

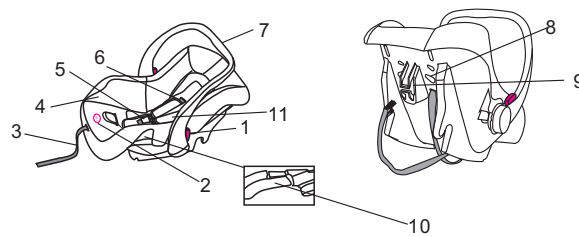

1	Handle Adjustment Red Button	7	Carrying handle
2	Harness Adjuster under Press	8	Shoulder Strap Slots
3	Harness Adjuster Strap	9	Diagonal Belt Guide
4	Cover	10	Lap Belt Guide
5	Buckle	11	Shoulder Pad
6	Shoulder Straps		


### ADJUSTING THE SHOULDER HEIGHT

The harness has 2 adjustable positions, to obtain the correct shoulder height and fit. Install the straps into the slots level or slightly above the shoulders. Remove straps by passing through the slots from the front to the back of the capsule. Reinstall through appropriate slots.



**ADJUSTING AND USING HARNESS**

If the height of your shoulder straps in child car seat is not fit for your child, Adjust the height of the shoulder straps , please proceed as follows:



Step 1: Loosen the shoulder harness (see point Below).

Step 2: Pull out the buckle tongues from the shoulder and the slots on the cover and the shell, then thread them into the corresponding strap slots. Ensure that both of the shoulder straps go through slots at the same height ,and not twisted.

**1. Loosening the shoulder straps**



Step1.The shoulder straps is slackened by pressing the lever (under the seat cover) on the front of the seat.

Step2. Press down on the label marked Press as you grip the two shoulder straps with your other hand. Pull the shoulder straps towards you to loosen it.

**2. Securing the baby with the harness**



Firstly, adjust the shoulder straps height(see point ADJUSTING THE SHOULDER HEIGHT), proceed as follows:  
**Step1.** Loosen the harness(see point above), open the buckle, and place them down sideways. Seat your child in the child car seat. Place both shoulder straps over your child's shoulders.  
**Step2.** Put the two plastic sections of the buckle connector 1 and 2 together (fig.1), Slot the two buckle connectors into the slot in the top of the buckle until they "click" into place (fig.2)  
 Check the harness is correctly locked by pulling the shoulder straps upwards(fig. 3 ).

**3. Tighten the shoulder harness**



Pull the shoulder straps upwards to remove the whole harness then pull the adjuster strap until the harness is fully tightened(fig. left).

The harness should be adjusted as tightly as possible without causing discomfort to your child.

**TO RELEASE THE HARNESS, PRESS IN THE RED BUTTON ON THE BUCKLE.**

**SECURING THE INFANT CARRIER**


Please read the operating handbook in your vehicle to inform yourself about the basics concerning children's seats in vehicles.

**DO NOT** place this baby seat on seats with airbags.

This baby car seat can only be installed using a three-point vehicle belt.

The baby car seat must be installed rearwards

PLEASE NOTE: It is important that the capsule is level when installed in your vehicle, in order to give your child the correct head support. Add a rolled up towel or similar under the front edge of the capsule base if required. Ensure the restraint is as firmly secured as possible.




Step 1. Adjust the handle to the forward position (Fig. 1). Put the seat in car's seat. Handle must be firmly against the backrest of car's seat

Fig. 1




Step 2. Slide the lap belt of the vehicle's 3-point seatbelt through both Lap belt guides. Let the tongue plate snap in the belt lock with a clearly audible click. Pull the shoulder belt in narrow direction to tighten the lap belt. Check to make sure the tongue plate is locked by pulling on the belt(Fig. 2).

Fig. 2



Step 3. Place the diagonal belt in the diagonal belt guide at the back of the seat(Fig. 3)

Fig. 3



Step 4. Tighten the vehicle's own 3-point seatbelt by pulling hard on the positions showed in fig. 3 and fig. 4.

Fig. 4






Fig.5

Note: It is important that the vehicle belt buckle is kept as low as possible to the vehicle seat. Do not under any circumstances have the buckle positioned over, in or against the top edge of the child restraint. Check and adjust belt length prior to fitting.

Make sure all the belts' position is right and they has not become twisted. Also check that the cover is not impeding the movement or fit of the belt webbing in any way.

To release your baby car seat following the above instructions in reverse order.

#### ADJUSTING THE CARRYING HANDLE




The handle for the baby car seat can be adjusted into 4 stable positions. To adjust the handle, please press the red button of handle on both side at the same time. now it can be rotated.



1



2



3




4

The carry handle has four positions:

1. Forward facing Installed in the car. This position(only this position)is suitable for the baby car seat installed on the vehicle seat.
2. Straight up for carrying
3. Handle clicked back to initiate the rocking feature
4. Down to support baby for feeding and play


Ensure that the handle is locked in a position, the harness is correctly fitted and the buckle fastened before carrying your car seat.

### CANOPY Assembly



1 Insert the frame through sleeve of canopy.

**NOTE:** Curved side of canopy frame must point towards canopy material.



2 To attach canopy, fit back of canopy over back of shell. Snap each plastic strip end to each canopy post.

### CARE OF YOUR PRODUCT

#### REMOVING THE COVER

The fabric cover can be easily removed for washing. Remove the harness by gently feeding the harness straps through from the front to the back of the seat, the crotch strap including the buckle should be removed; turn the metal slide underneath the shell on its side and feed it through the shell until the strap is free. Remove the cover and hand wash at 30, line dry only.

To replace the fabric cover, follow reverse of the above.

#### CLEANING THE SEAT

The harness and plastic parts can be sponged with very mild detergent and warm water. Do not use chemical cleansers, bleach or corrosives on any part of the seat.

#### ACCESSORIES

The seat cover is an integral part of the restraints safety performance. Should it need replacing, only a replacement from the manufacturer must be used. Contact the Retailer or Supplier for parts replacements.

## **CLEANING INSTRUCTIONS**

### **1.CLEANING THE SEAT COVER**

The covers and fabrics can be gently hand washed at 30 degrees maximum and air dried.

**DO NOT MACHINE WASH OR TUMBLE DRY FABRICS IN A DRYER.**

### **2.CLEANING THE STRAP SYSTEM**

The strap system can be cleaned with a moist towel. Please do not wash the straps in a washing machine or with chemical detergents.

Please make sure to avoid getting dirt on or in the buckle so that it retains its ability to function. If however dirt compromises its ability to function, you can soak buckle in a mild soap bath and then rinse it off with lots of warm water.

If you still have concerns about the buckle ability to function, we would be glad to send you a replacement.

### **3.CLEANING THE BABY SEAT**

The plastic baby seat and the carrying handle can be cleaned with a moist towel.

## **CUSTOMER SERVICE**

If you experience a problem with this product or require assistance.

Please contact our local sales agent, or contact our customer service department.

Distributed by  
Baby Factory (NZ) Ltd  
58 Stonedon Dr  
East Tamaki  
Auckland, NZ  
Ph 09 2744986  
[www.babyfactory.co.nz](http://www.babyfactory.co.nz)