




Supplied by Baby Factory NZ, Ltd.
58 Stonedon Drive, East Tamaki, Auckland, New Zealand
www.babyfactory.co.nz

Due to variation in style and design the illustrations used in this instruction manual are generic.
Variation in design may occur in the images shown.



i-Size **Infant Carrier** **Instruction Manual**

ECE R129/03
40-87 cm
≤13kg

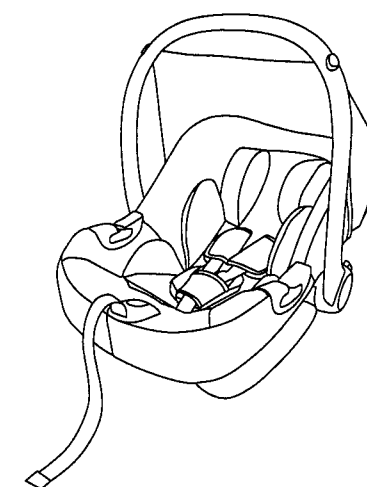

IMPORTANT:
READ CAREFULLY AND
KEEP FOR FUTURE REFERENCE

Contents

Index.....	02
Fixing Modes.....	03
Components.....	04
Product Information.....	05
Warnings.....	06-07
How to Secure your Child.....	08-09
Adjusting the Carrying Handlebar.....	10
Adjusting the Sun Canopy.....	10
Removing the Car Seat Cover.....	11
Instruction for Use in the Car.....	12
Installing the Car Seat in the Vehicle.....	13
Cleaning.....	14
Product Care.....	14
Product Lifespan.....	15
Disposal.....	15

Fixing Modes

Fixing with vehicle safety belts:


The Babylo i-Size Infant Carrier is installed in the vehicle using the 3-point seatbelt. It cannot be installed using a 2-point or lap belt.




Fixing with Isofix Base:

The Babylo i-Size Infant Carrier attaches to the Babylo i-Size Base with ISOFIX fastening system, which is fixed in the car to the ISOFIX attachments positioned between the seat and the back of the rear seat of the car.

Consult the instruction manual of the Babylo i-Size Base for the correct installation in the car.

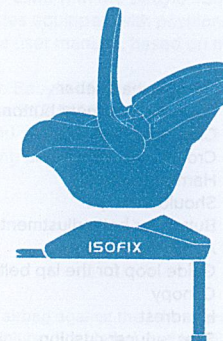

Components

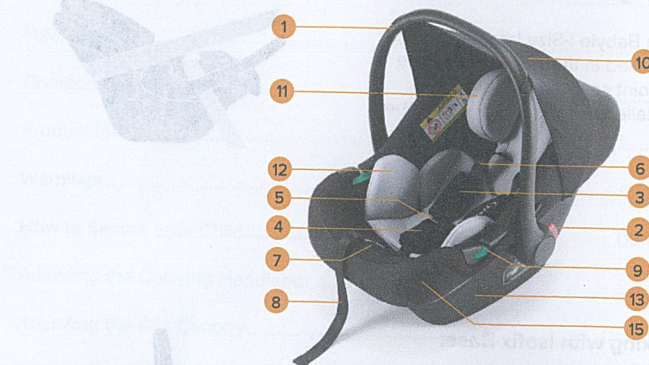

1. Carrying handlebar
2. Handle adjustment button
3. Chest belt protectors
4. Crotch belt protection
5. Harness buckle
6. Shoulder straps
7. Button for belt adjustment
8. Adjustment strap
9. Guide loop for the lap belt
10. Canopy
11. Headrest
12. Seat reducer cushion
13. Frame
14. Chest belt guide loop
15. Lining



Product Information

Suitable for children between 40 and 87 cm in height and maximum weight of 13 kg. The Babylo i-Size Infant Carrier must be installed in the car in combination with the Babylo i-Size Base approved according to UN Regulation No. 129, suitable for i-Size compatible car seats, as indicated by the vehicle producer in the owner's use and maintenance manual.

IMPORTANT: For any health problems inherent in low-weight babies and premature babies, always consult doctors or specialized hospital staff on the suitability of using the infant carrier, before leaving the hospital or using the restraint device.

The Babylo i-Size Infant Carrier alone can also be installed with only the 3-point seat belt of the static vehicle or with reel, approved according to UN/ECE Regulation N° 16 or other equivalent standards. It cannot be used with a 2-point or lap belt. **DO NOT** install this infant carrier on passenger seats equipped with active airbags. Deactivate the airbag before installing the infant carrier. Using this infant carrier on seats equipped with active airbags can cause serious injury or death in the event of an accident. When used with the Babylo i-Size Base, this restraint system can be fixed on vehicles equipped with positions approved as ISOFIX positions (for details see the user manual), based on the category of the child's seat and the structure.

The Babylo i-Size Infant Carrier together with the Babylo i-Size Base is an i-Size restraint system approved in accordance with the ECE R129 Regulation for children with a height between 40 and 87 cm and a maximum weight of 13 kg. This car seat must only be used in rearward facing position.



DANGER!

DO NOT USE THE INFANT CARRIER POSITIONED ON A PASSENGER SEAT EQUIPPED WITH AIRBAG.

The opening of an airbag against the infant carrier can cause serious injury, if not lethal, to the child. Refer to the vehicle instruction manual.

With regards to the use of car seats, check whether the compatibility with ISOFIX retention systems is indicated in the vehicle's use and maintenance manual.

Warnings

IMPORTANT! READ CAREFULLY BEFORE USE AND KEEP FOR FUTURE REFERENCE.

The instruction manual should be kept safely with the child restraint system for its life period.

IMPORTANT: This child restraint system must always be used in a rearward facing position.

WARNING! Assembly and installation operations must be carried out by adults.

WARNING! Do not leave your child unattended in the car, even for short periods. The interior temperature can change abruptly and become dangerous for the child inside.

WARNING! In the car, always use the infant carrier. If the car is moving, never remove the child from the seat.

WARNING!! Always secure your child with the safety harness when using this infant carrier. Make sure that the infant carrier harness is correctly tensioned to ensure maximum protection for your child.

WARNING! It is important that the lap harness is worn low down, so that the pelvis of the child is firmly engaged.

WARNING! Do not install this infant carrier on passenger seats equipped with active airbags. Deactivate the airbag before installing the infant carrier. Using this infant carrier on seats equipped with active airbags can cause serious injury or death in the event of an accident.

WARNING! Carefully follow the instructions for correct installation; do not use installation methods other than those indicated, danger of detachment from the seat.

WARNING! To avoid the risk of falling, always use the infant carrier restraint system even for transport outside the car.

WARNING! Do not use the infant carrier if it has broken or missing parts or if it has been subjected to violent stresses in an accident. It could have suffered structural damage that is not visible but extremely dangerous.

WARNING! Make sure that luggage or other objects inside the vehicle are secured, to reduce the risk of possible injury in the event of an accident.

Warnings

WARNING! The harness buckle has been designed to be released quickly in an emergency. IT IS NOT CHILD PROOF. More inquisitive children may learn to undo the buckle. Children should be told never to play with the harness buckle or any other part of the infant carrier.

WARNING! DO NOT use a restraint device with damaged or missing parts.

WARNING! DO NOT use the harness or seat belts if they are damaged or show signs of wear.

WARNING! After an accident the child restraint system and vehicle seat belts should be replaced. Although they may look undamaged, they may not protect your child as well as they should.

WARNING! Do not place items such as a towel or cushion under the child restraint system. This could affect the performance of the child restraint system in an accident.

WARNING! DO NOT replace the cover or harness with a cover or harness other than those recommended by the manufacturer, as they have a direct impact on the operation of the restraint device.

WARNING! Prevent seat or harness from getting stuck in a folding or movable seat, or in the car door.

WARNING! Do not leave the infant carrier in the car under sun exposure, some parts may have overheated and harm the baby's delicate skin, check before placing the baby in the infant carrier.

WARNING! Do not peel off the adhesive and sewn labels; could make the product non-compliant with the law.

WARNING! Do not use accessories that are not approved by the manufacturer or by the competent authorities.

WARNING! Your product requires a minimum of cleaning and maintenance. These operations should only be performed by adults.

WARNING! FOR USE AS A RECLINED CRADLE

Do not use the reclined cradle once your child can sit unaided. This reclined cradle is not intended for prolonged periods of sleeping. Always use the restraint system.

It is dangerous to use this reclined cradle on an elevated surface, e.g. a table.

WARNING! Keep all straps used to secure the infant carrier to the car under tension and adjust the child restraint belts. It is important not to twist the seat belts.

WARNING! All important parts of the infant carrier should be checked regularly to make sure they are not damaged. All mechanical components must function properly.

WARNING! It is absolutely essential to ensure that the infant carrier is not stuck between rigid objects such as vehicle doors, seat rails etc. as this could cause damage.

WARNING! Do not modify, dismantle or add to any part of the child restraint system or change the way your vehicle seat belts are made or used.

How to Secure your Child

Fig. 1

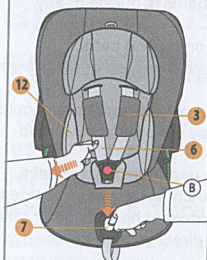


Fig. 2

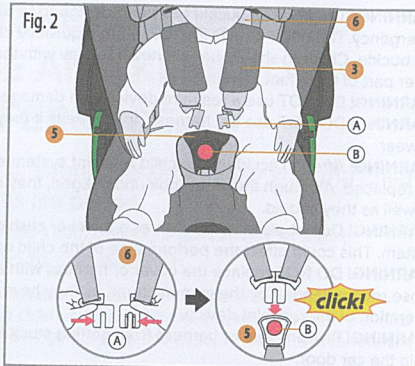


Fig. 3

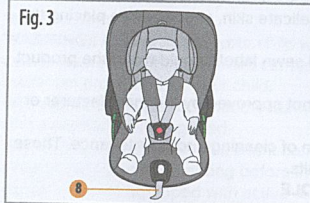


Fig. 4

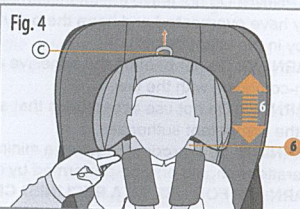


Fig. 5


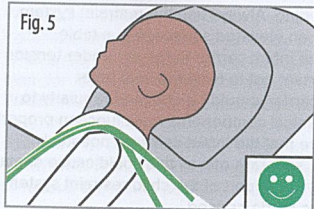


Fig. 6

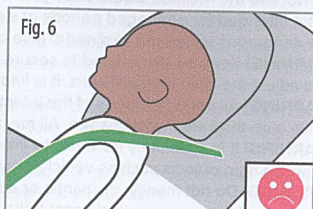

How to Secure your Child

Seat belt adjustment:

IMPORTANT! Make sure the infant carrier is free from toys and hard objects.

- Loosen the shoulder straps (6) by pressing the central adjustment button (7) and pulling both shoulder straps upwards at the same time (fig. 1).
- Undo the belt buckle by firmly pressing the red button (B).

IMPORTANT! It is recommended that you always pull on the strap (6) and not the harness pads (3).

- Place the child in the seat and place the shoulder straps (6) directly on the child's shoulders (fig. 2).

IMPORTANT! Make sure the shoulder straps (6) are not twisted.

- Join both tabs (A) and insert them into the buckle (5) with an audible "click".
- Carefully pull the central adjustment strap (8) to tighten the shoulder straps (6) until they fit the child's body (fig. 3).

IMPORTANT! Do not over-tighten the straps, leave a minimum slack.

Headrest adjustment:

- A correctly adjusted headrest ensures the optimal position for the child sitting in the seat. The headrest must be adjusted so that the distance between the child's shoulders and the headrest does not exceed 2 cm (about 2 fingers wide) (fig. 4). The headrest must be positioned so that the seat belts are level with or slightly below the child's shoulders (fig. 5-6).

NOTE! The shoulder straps (6) are firmly attached to the headrest and do not need to be adjusted separately.

- Pull the adjustment handle (C) upwards to release the headrest. Now you can adjust the headrest (6 positions available).

Seat reducer cushion:


- The seat reducer cushion (12) **MUST** be used when your child's height is between 40 and 60cm (fig. 1).
- After your child's height exceeds 60cm the infant carrier can be used without the seat reducer cushion.

Adjusting the Carrying Position

The carrying handlebar can be locked in four positions. To adjust the carrying handlebar, press the left and right buttons (D) at the same time, then rotate the handlebar (1) forwards or backwards until it automatically locks in one of the 4 desired positions:

- a - In vehicle driving position.
- b - Transport position.
- c - To put the child in the seat.
- d - For a secure location on a flat surface outside the vehicle.


WARNING! To prevent the seat from tipping during transport, check whether the handle (1) is locked in the transport position "b".

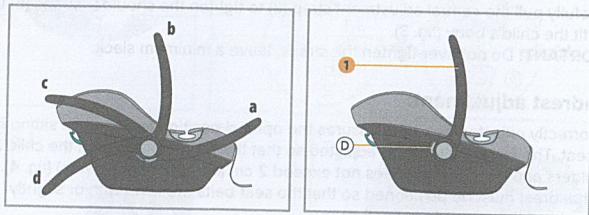

Adjusting the Sun Canopy

Open the sun canopy by unhooking the two elastic bands from the carrying handlebar and push the fabric towards the rear of the seat.

IMPORTANT! The canopy must not be used to lift the seat, danger of detachment.



Removing the Infant Carrier Cover

The infant carrier cover consists of 6 parts:

1 x backrest cover (15), 1 x infant reducer cushion (12), 1 x canopy (10), 1 x headrest cover (11), 1 x belt buckle pad (4) and 2 x shoulder strap pads (3).


To remove, please follow these instructions:

- Remove the canopy (10) from the frame, paying attention to the two rubber bands fixed to the carrying handlebar.
- Undo the belt buckle (5).
- Remove both shoulder strap pads (3) from the straps (6) and the buckle padding (4).
- Remove the reducer cushion (12).
- Remove the headrest (11).
- Remove the cover (15) paying attention to the passage over the various plastic inserts.

Be careful not to break or damage the internal polystyrene structure.

WARNING! Under no circumstances must the infant carrier be used without the cover.

WARNING! Only original parts can be used.

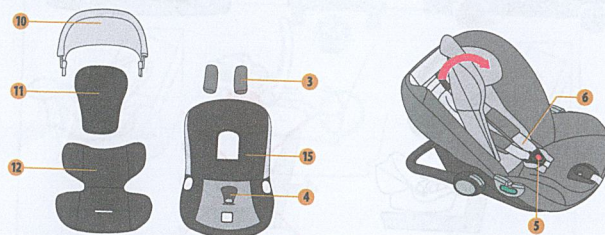


To reattach the infant carrier cover:

WARNING! Be sure not to twist the shoulder straps.

Follow the steps above but in reverse order to reattach the cover.

Instructions for Use in the Car

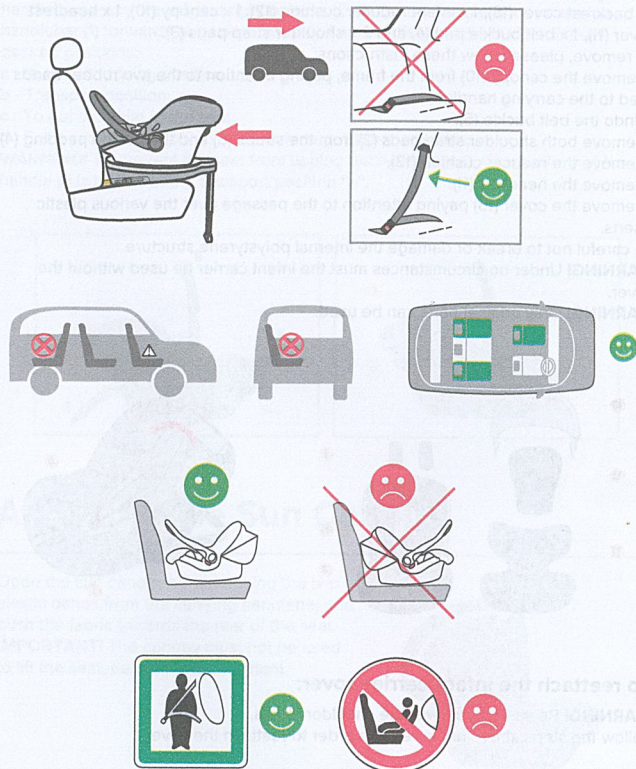

Installing the Infant Carrier in the Vehicle


IMPORTANT: for convenience, the child should already be secured in the seat BEFORE attaching the infant carrier to the seat with the vehicle seat belts. To secure the child's infant carrier with the vehicle's 3-point safety belt, proceed as follows:

- Fit the infant carrier by securing it to the seat with the vehicle seat belts.
- Pass the horizontal (lap) seat belt of the car through both belt guide loop passages (9) and fasten the buckle (E).
- Pass the diagonal (pectoral) seat belt of the car around the backrest of the seat, through the loop for the diagonal belt (14), tighten the car belt and rotate the handle to driving position.

If the vehicle's seat belt is too short, adjust its height to the lowest position.

WARNINGS!

- **DO NOT** use different routes to attach the seat belts.
- **DO NOT** use a 2-point safety belt to secure this child restraint device.
- This infant carrier must always and only be installed in the opposite direction to the direction of travel, on a seat in which the orientation is in the direction of travel. Make sure that the child is properly secured with the restraint harness and that the infant carrier is firmly fixed in the car.

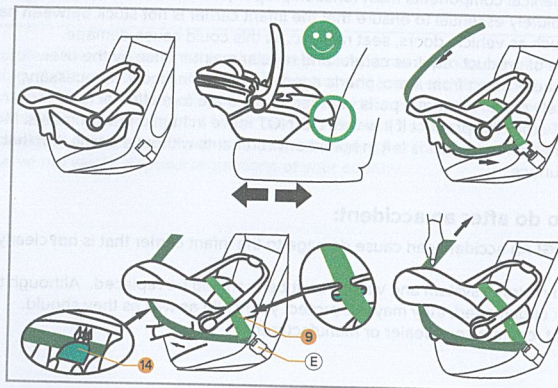

Refer to the Babylo i-Size Base instruction manual for fitting instructions with the ISOFIX base.

Cleaning

It is important to only use the original upholstery as this is an essential part of the functionality.

DO NOT wash fabrics. Spot clean only using a soft sponge with diluted detergent or water. Dry in shade and not in the sun. Do not iron. Do not dry clean. Wipe metals and plastic parts with a mild detergent and lukewarm water.

DO NOT do not use chemical cleaners or bleaches (ammonia, petrol, solvents etc.) under any circumstances.

WARNING! The integrated harness system cannot be removed from the seat.

Do not remove parts of the restraint system.

Product Care

- All important parts of the infant carrier should be checked regularly to make sure they are not damaged.
- All mechanical components must function properly.
- It is absolutely essential to ensure that the infant carrier is not stuck between hard objects such as vehicle doors, seat rails etc. as this could cause damage.
- This type of product requires careful and regular maintenance by the user.
- Protect the product from atmospheric agents, water, rain, snow. If necessary, immediately dry all the metal parts in order to avoid the formation of rust.
- DO NOT store the product if it is wet. DO NOT leave in humid environments. Mold is formed when a product is left in humid environments without a circulation that can dry the surface.

What to do after an accident:

WARNING! An accident can cause damage to the infant carrier that is not clearly visible.

The child restraint system and vehicle seat belts should be replaced. Although they may look undamaged, they may not protect your child as well as they should.

If in doubt, contact your dealer or manufacturer.

Product Lifespan

This infant carrier has been designed to be able to perform its intended functions with ordinary use for a product life of approximately 7 years.

Gradual wear of plastic, for example caused by exposure to sunlight (UV), can cause a slight deterioration of product properties. Since very high temperature fluctuations and other unpredictable stresses are common in vehicles, the following points must be observed:

- If the vehicle is directly exposed to strong sunlight for long periods, the child seat must be removed from the vehicle or covered with a light cloth.
- Regularly check all plastic and metal parts of the seat for any damage or changes in shape or color. If you notice a change in the seat, it must be disposed of or checked and replaced by the manufacturer if necessary.
- Fabric variations, especially fading, are normal with use in a vehicle and do not affect the functionality of the seat.

Disposal

To protect the environment we ask the user to separate and dispose of the waste arising at the beginning (packaging) and at the end (parts of the product) of the life of the infant carrier. Waste disposal is organized differently according to local authorities. To ensure that the infant carrier is disposed of in accordance with regulations, contact your local waste disposal agency or local authority. Always observe the waste disposal regulations of your country.